

EXCELLENT PERFORMANCE
EASY INSTALL
FEATURE RICH



SEMI-CUTOFF



ROTATE BASE




FULL CUTOFF

stocked in bronze



Excellence in form, function, and performance, the WallShine is made for field adjustable semi-cutoff for furthest throw and full cutoff for style, reduced glare, and dark sky compliance. Made of long lasting die cast aluminum with corrosion resistant polyester, Lumiled 3030 LEDs, and 10kV surge protection


- *Superior footcandles uniformity*
- *Rugged and simple easy install system*
- *Excellent thermal management*
- *Motion & Photocell Enabled*

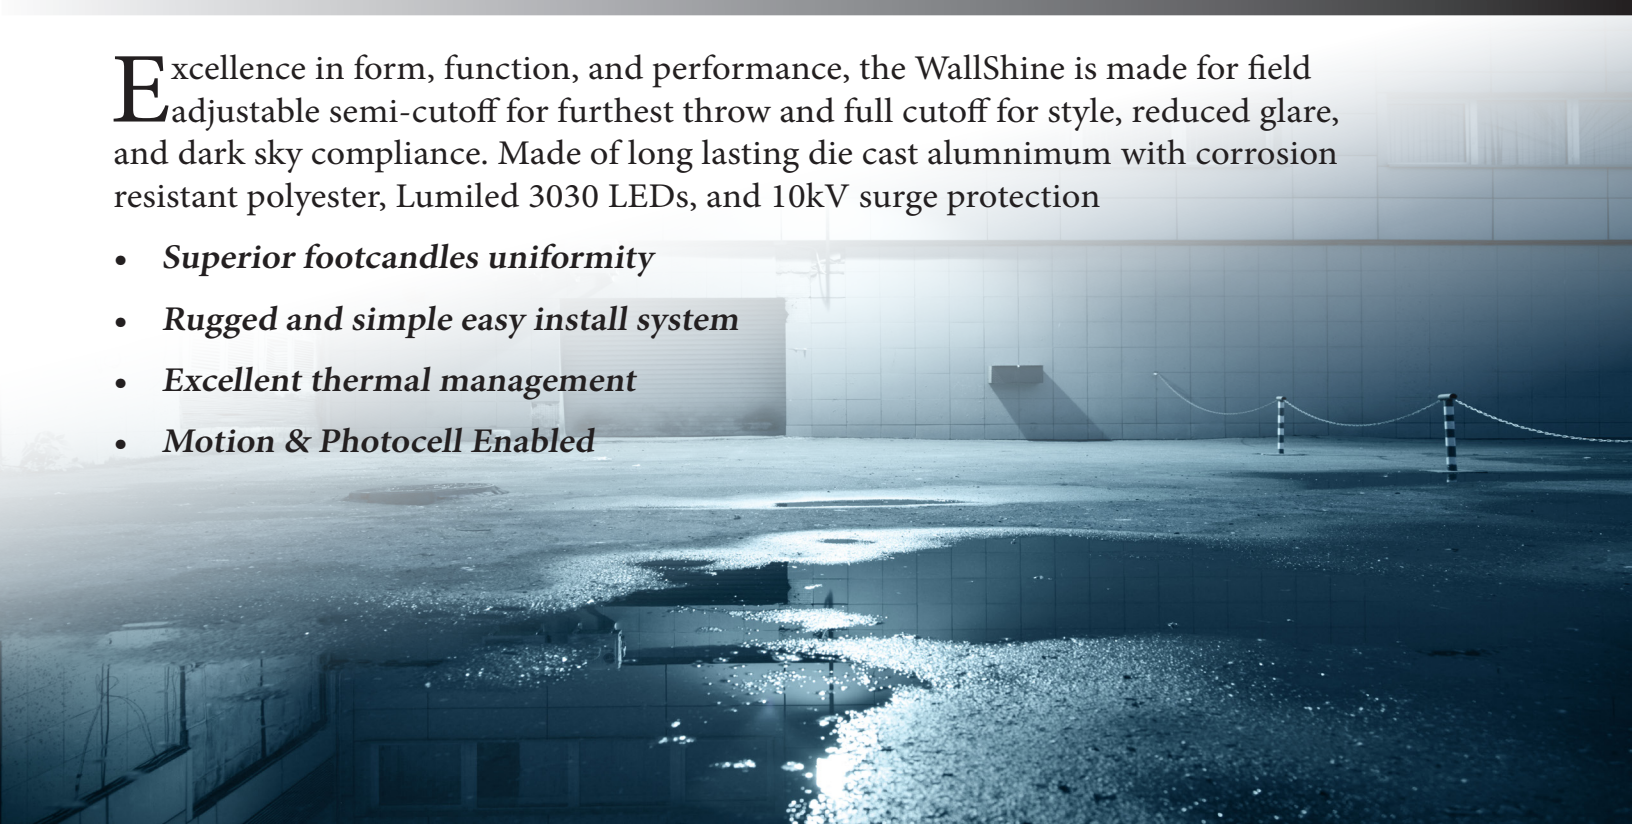

PERFORMANCE

Product	Wattage	Lumens*	Replaces	Dimensions	Voltage	CRI	Op Temp
WP02	25W	5000k; 3,410	75W-120W	8.2 lbs weight 7.8" height 8.7" wide 8.2" depth	100-277V 277-480V	72+	-40°C +55°C
	35W	5000k; 4,830	120-175W				
	50W	5000k; 7,350	175-250W				
	60W	5000k; 8,260	250W	11.0 lbs weight 9.0" height 13.3" wide 9.5" depth			
	75W	5000k; 10,400	250W-400W				
	100W	5000k; 13,800	400W				
	120W	5000k; 16,810	400W				

* Other CCT's available as special order

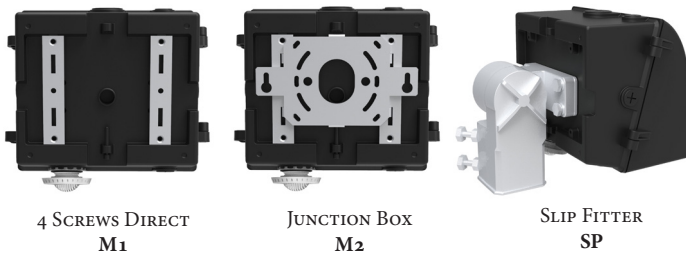

If controls (motion or photocell are included), the unit cannot be flipped.

ORDERING

EXAMPLE **WP02-60-A-50K-T4-M1-N**: 60 watt unit on a 120-277V line at 5000K, with T4 optics and direct wall mount

Product	Wattage	Voltage	CCT	Optics	Mounting	Controls
WP02	25 35 50 60 75 100 120	U 120-277 H 277-480	50K = 5000K 40K = 4000K* 30K = 3000K* 27K = 2700K*	T4	M1 4 Screw Direct M2 Junction Box SF Slip Fitter	N None D1 Photocell D2 Motion Sensor EB Emergency Backup

- * Special Order, not usually stocked
- Available in bronze
- Please call for other color options

HiLUMZ USA

1335 Ridgeland Parkway
 Suite 150
 Alpharetta, GA 30004

sales@hilumzusa.com
 678-867-9200
 HiLumzPRO.com